

科目：通訊系統(5007)


校系所組：中大通訊工程學系甲組

清大電機工程學系乙組、通訊工程研究所甲組

1. (20%) Consider the communication system in response to a signal  $s(t)$  as in the following figure. The linear channel suffers from multipath distortion and the channel output is defined by

$$x(t) = a_1 s(t - \tau_1) + a_2 s(t - \tau_2)$$


where  $a_1$  and  $a_2$  are constant and  $\tau_1$  and  $\tau_2$  represent the corresponding delays of the propagation paths.

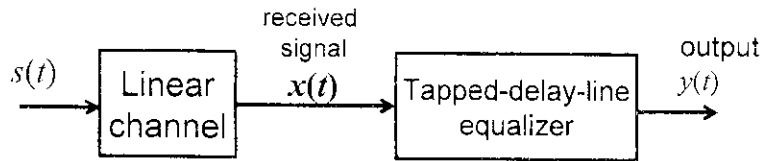

Now you are supposed to design the tapped-delay-line filter to equalize the multipath distortion produced by this channel. The time response of the tapped-delay-line filter is

$$y(t) = w_0 x(t) + w_1 x(t - T) + w_2 x(t - 2T).$$

- (a) (4%) Find the frequency transfer function of the linear channel.  
 (b) (6%) Identify the desired frequency response at the equalizer output such that the channel multipath distortion is equalized.  
 (c) (10%) Assuming that  $a_2 \ll a_1$  and  $\tau_2 > \tau_1$ , evaluate the parameters of the tapped-delay-line equalizer, i.e.  $w_0, w_1, w_2$ , and  $T$ , such that the channel multipath distortion is equalized.
2. (20%) Suppose we transmit a signal  $s(t)$  through an additive white Gaussian noise channel. Assume that  $s(t)$  is equal to  $s_1(t), s_2(t), s_3(t)$ , or  $s_4(t)$  with equal probability, where the waveforms are given as follows:

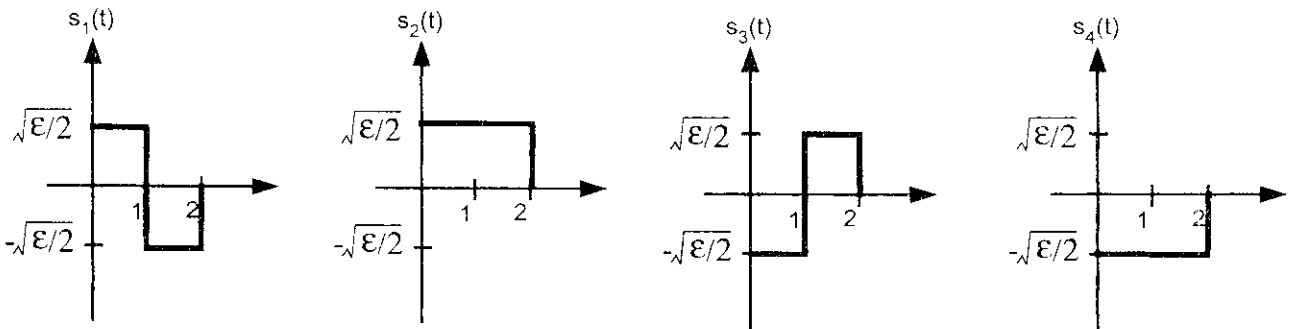

- (a) (6%) Use the Gram-Schmidt procedure in the order of  $s_1(t), s_2(t), s_3(t), s_4(t)$  to find the ordered set of orthonormal basis functions  $\{f_1(t), f_2(t), \dots, f_K(t)\}$ , where  $K$  is the dimension of the signals. Find  $K$  and give the vector expression  $\mathbf{s}_1, \mathbf{s}_2, \mathbf{s}_3, \mathbf{s}_4$  for each of the waveforms, respectively, with the ordered set of basis functions derived above.

- (b) (8%) Following from (a), suppose that the signal is passed through a vector channel so that the receiver observes

$$\mathbf{r} = \mathbf{C} \cdot \mathbf{s} + \mathbf{n},$$

where  $\mathbf{n}$  is a Gaussian vector with zero mean and covariance matrix  $\Sigma = \text{diag}(\sigma_1^2, \sigma_2^2, \dots, \sigma_K^2)$ . Derive the optimal detector that minimizes the error probability when  $\mathbf{C} = \mathbf{I}$ , where  $\mathbf{I}$  is the  $K$ -by- $K$  identity matrix, and compute the symbol error rate assuming that  $\mathbf{C} = \mathbf{I}$  and  $\sigma^2 \triangleq \sigma_1^2 = \sigma_2^2 = \dots = \sigma_K^2$ .

- (c) (6%) Following from (b), derive the symbol error probability for  $\mathbf{C} = \begin{bmatrix} \sqrt{E} & -\sqrt{E} \\ \sqrt{E} & \sqrt{E} \end{bmatrix}$  and  $\sigma^2 \triangleq \sigma_1^2 = \sigma_2^2 = \dots = \sigma_K^2$ .

科目：通訊系統(5007)

校系所組：中大通訊工程學系甲組

清大電機工程學系乙組、通訊工程研究所甲組

3. (10%) Let  $X(t)$  be a baseband transmitted signal of a symbol sequence  $A_n$  given by

$$X(t) = \sum_{n=-\infty}^{\infty} A_n g(t - T_d - nT)$$

where  $A_n$  is an independent identically distributed (iid) complex random sequence with zero mean and variance  $\sigma_A^2$ ,  $T_d$  is a random variable uniformly distributed over  $[0, T]$ , and  $g(t)$  is a pulse shaping function. It is known that the power spectral density of  $X(t)$  is given by

$$S_{XX}(f) = \frac{\sigma_A^2}{T} |G(f)|^2$$

where  $G(f)$  is the Fourier transform of  $g(t)$ .

- (a) (3%) Find  $S_{XX}(f)$  if  $g(t) = u(t) - u(t - T)$  where  $u(t)$  is a unit-step function.

- (b) (7%) Let  $p(t) = u(t) - u(t - T_c)$  and

$$g(t) = \sum_{k=0}^{N-1} c_k p(t - kT_c)$$

where  $T_c = T/N$  and  $c_k$  are iid binary random variables of  $\{\pm 1\}$  with  $\Pr(c_k = 1) = \Pr(c_k = -1) = 1/2$ . Find  $S_{XX}(f)$ .

What are the distinctions between the results of part (a) and part (b)?

4. (10%) Consider a coherent binary frequency shift keying (BFSK) system where symbols '0' and '1' occur with equal probability. Let symbols '1' and '0' be encoded by signals  $s_1(t)$  and  $s_2(t)$ , respectively, where

$$s_i(t) = \begin{cases} \sqrt{\frac{2E_b}{T_b}} \cos(2\pi f_i t), & 0 \leq t \leq T_b \\ 0, & \text{otherwise} \end{cases}$$

in which  $E_b$  is the transmitted signal energy per bit,  $T_b$  is the symbol duration and  $f_i = (n_c + i)/T_b$  for some fixed integer  $n_c$ . The received signal can be expressed as

$$x(t) = s_i(t) + w(t)$$

where  $w(t)$  is a white Gaussian process with zero mean and power spectral density equal to  $\mathcal{N}_0/2$ .

- (a) (5%) Determine the optimum receiver with minimum bit error rate (BER).

- (b) (5%) Derive the BER of the optimum receiver in terms of the complementary error function or Q-function defined as follows:

$$Q(u) = \int_u^{\infty} \frac{1}{\sqrt{2\pi}} e^{-z^2/2} dz = \frac{1}{2} \operatorname{erfc}\left(\frac{u}{\sqrt{2}}\right)$$

$$\operatorname{erfc}(u) = \frac{2}{\sqrt{\pi}} \int_u^{\infty} e^{-z^2} dz = 2Q(\sqrt{2}u)$$

科目：通訊系統(5007)

校系所組：中大通訊工程學系甲組

清大電機工程學系乙組、通訊工程研究所甲組

5. (20%) Consider the random variables  $X$  and  $Y$  with joint probability density function

$$f_{XY}(x, y) = \frac{1}{2\pi\sigma^2} e^{-\frac{(x-\mu)^2 + y^2}{2\sigma^2}}.$$

(a) (5%) Please find the marginal probability density function  $f_Y(y)$ .

(b) (15%) Please find the probability density function  $f_R(r)$  of  $R = \sqrt{X^2 + Y^2}$  in terms of the modified Bessel function of

the first kind of zero order  $I_0(x) \equiv \frac{1}{2\pi} \int_0^{2\pi} e^{x \cos \theta} d\theta$ .

6. (20%) We consider the maximum-ratio combining scheme. We have received a set of noisy signals  $\{x_j(t)\}_{j=1}^N$ , where  $x_j(t)$  is defined by

$$x_j(t) = s_j(t) + n_j(t), \quad j = 1, 2, \dots, N.$$

The signal components  $s_j(t)$  are locally coherent, that is,  $s_j(t) = z_j m(t)$ ,  $j = 1, 2, \dots, N$  where  $z_j$  are positive real numbers, and  $m(t)$  denotes a message signal with unit power. The noise signals  $n_j(t)$  have zero mean and variance  $\sigma_j^2$ , and they are statistically independent. The output of the linear combiner is defined by  $x(t) = \sum_{j=1}^N \alpha_j x_j(t)$  where the parameters  $\alpha_j$  are the combiner coefficients to be determined.

(a) (10%) Show that the output signal-to-noise ratio is  $(SNR)_O = \left( \sum_{j=1}^N \alpha_j z_j \right)^2 / \sum_{j=1}^N \alpha_j^2 \sigma_j^2$ .

(b) (10%) Please show that the optimum values of the combiner's coefficients to maximize the output signal-to-noise ratio are

$$\alpha_j = z_j / \sigma_j^2. \quad (\text{Hint: Schwarz inequality})$$